



A80 SILICONE LUBRICANT




**Plaster
Mold**



**Plastic
Mold**



**Concrete
Mold**

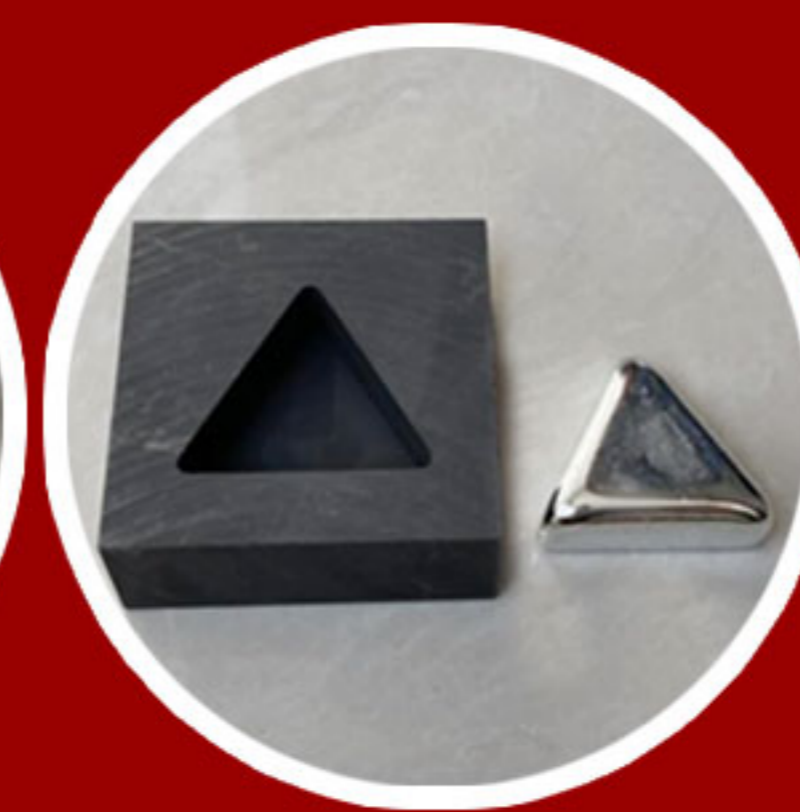

**Metal
Mold**



**Rubber
Mold**

**CONCRETE
MOLD**

**PLASTER
MOLD**

PLASTIC MOLD



RUBBER MOLD



METAL MOLD



WHERE? TO USE?

As a cleaner and mold release agent in plaster molds, plastic molds, concrete molds, metal molds and rubber molds.

It does not contain any propellants harmful to the ozone layer.



**QUICK
DRYING**



HOW? TO USE?

Clean the dirt and oil from the application surface. Shake the can thoroughly before use. Condition the product at room temperature prior to use for best results.

Spray approx. 20-25 cm (8-10 in) distance from the surface. Apply in a thin and even layer.

It works perfectly even at high temperature and pressure.

Dries fast and leaves a clear,
non-staining, non-sticky surface
that won't attract dirt.



It does not cause corrosion or
deformation in molds. It can be
used safely for a long time.

